

Screens » Desking Screens




Collections: Mallee

Applications: Desk Accessories (Dividers & Screens)

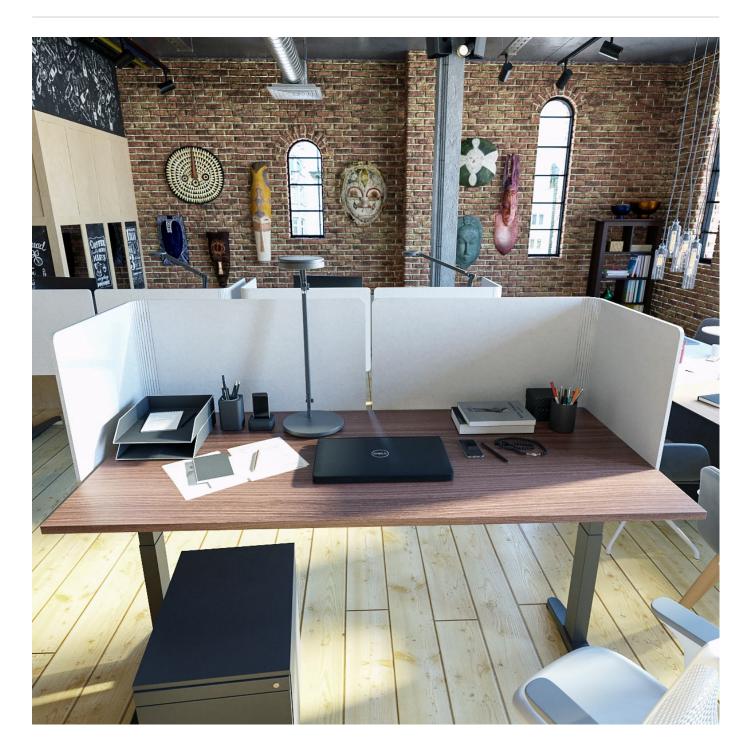

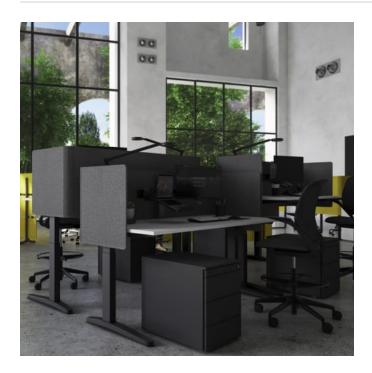











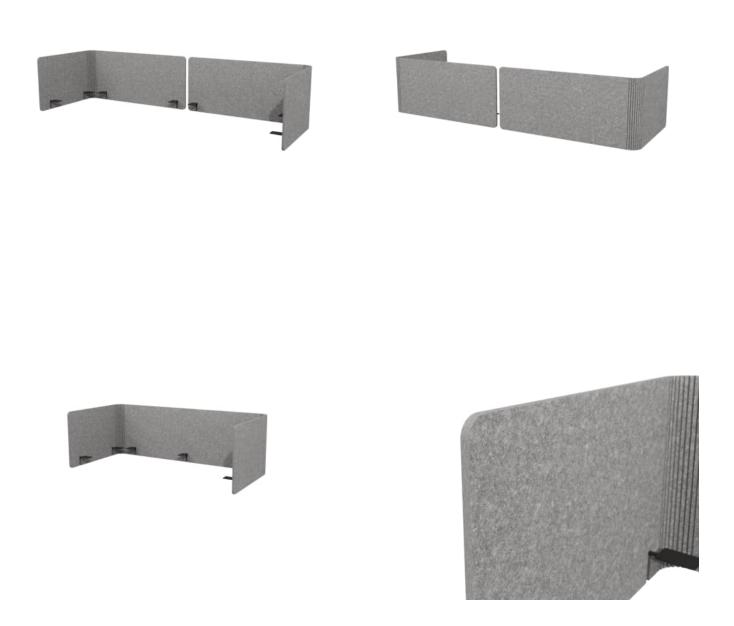



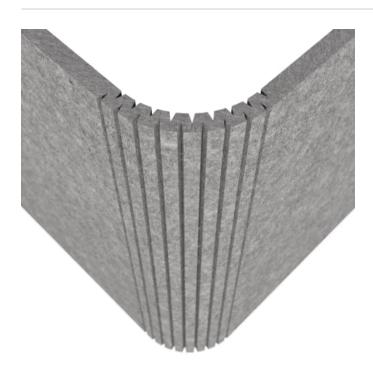



Screens » Desking Screens

Mallee Desking Screen is the flexible, high-design and acoustically minded screen, that's ideal when you can't sacrifice aesthetics for privacy.

 ✓ Quick Ship ✓ Acoustic 	🗸 Easy Install	🗸 Easy Clean
Description	The Mallee Desking Screen is the flexible, high-design option when you aren't willing to sacrifice form or function.	
	The hidden hardware helps the aesthetics and accommodates different worksurface thicknesses, while the kerf cut gives a tight fit on rounded corners. Configuration is made easy with the C and L-shapes designs available in a range of 47"-72" widths, 24" to 30" heights, 24 PET colors and 4 wood prints.	
	Manufactured in the USA, the I flat packed and is simple to as	Mallee Desking Screen ships quickly, comes ssemble.
	func., Mallee Desking Screens	are easily cleaned with bleach and water.
Composition	Density 0.5 lb/ft² 2.4 kg /m²	
PET Colours	Standard Finishes:	
	Frost, Grass, Greige, Ivory, Line	det, Chambray, Cobalt, Ecru, Elderberry, Fossi n, Malachite, Mandarin, Meadow, Midnight, le, Pewter, Saffron, Sky, Slate, Smoke, Storm,
	4 Timber Prints: Eucalyptus, Ir	on bark, Merbau, Spotted Gum.
	Premium Finishes:	
		ralian Walnut, Cherry, Claro Walnut, Euro I, Maple, Palm Wood, Poplar, Redwood, Rustic
	Dark Tint, Raku Bone, Raku Lus Shale Dark, Terracotta Sun Ble	oncrete Cast, Concrete Polished, Concrete ter, Raku Jade, Shale Light, Shale Medium, ached, Terracotta Mission, Terracotta Antique m, Terrazzo Dark, Travertine Light, Travertine



Material	 60% post-consumer recycled PET bottles.
	 35% pre-consumer recycled content from PET chips
	 5% bio-based Polylactic Acid (PLA)
	Accessories: Steel + PET insert/liner with powder coat finish
Powder Coat	White ONLY
Dimensions	Width:
	• 47.2" (1200mm)
	• 48" (1220mm)
	• 55.1" (1401mm)
	• 60" (1524mm)
	• 63" (1601mm)
	• 70.9" (1801mm)
	• 72" (1829mm)
	Height:
	• 15.75" (400mm)
	• 23.75" (604mm)
	• 32.28" (820mm)
	Depth:
	• 24" (610mm)
	• 30" (762mm)
Fire Rating	ASTM-E84 – Class A classification AS ISO 9705 – 2003 – Group 1 classification EN-13501 – B-s2-d0 classification

Screens » Desking Screens

Made In	USA	
Lead Time	4 weeks	
Inclusions	Desk Brackets, PET panel	
Assembly & Delivery	Flat pack delivery, minimal assembly required.	
	See installation instructions for detail.	
Care Instructions	Dab func. with a damp clean cloth and mild solution of liquid detergent and warm water. Repeat using only clean water, then pat dry with a lint free cloth.	
	For difficult stains, use a solution of household bleach (10% bleach / 90% water).	
	To remove the bleach, repeat using a clean, water dampened cloth, then pat dry.	
	Always test in an inconspicuous area first and if you don't see the expected results, contact us.	
Warranty	5-year warranty.	
Additional Comments	To see how vivid the colors truly are, it's easy to request a sample through the "Request information" button on this page, or you can ask for one from your local sales guru.	
How to Specify	• Select 1 x PET Color	
	White Powder Coat Finish Only	
	 Select 1 x Wood Finish 	
	 Select Bracket - C-Clamp OR Blind Mount 	
	 Select Configuration L-Share or C-Shape 	
	Refer Product Specification Guide	

FUNC.

Screens » Desking Screens


Colour & Finish Options

func solid colors





Screens » Desking Screens

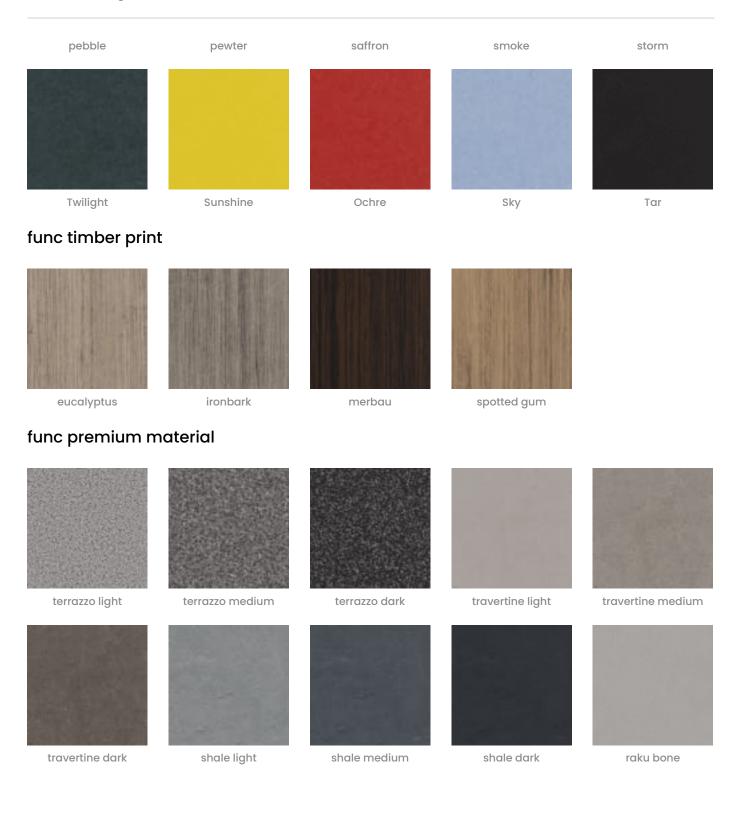


FUNC

Screens » Desking Screens



func premium wood

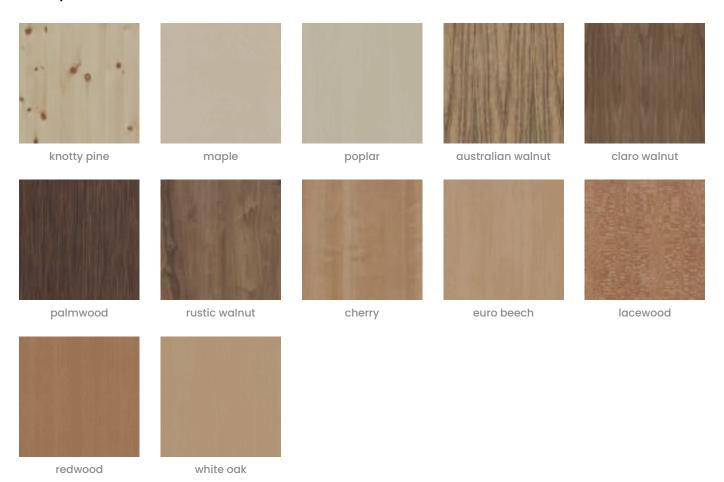

FUNC