
**Screens** » Benching Screens



Collection: Unna





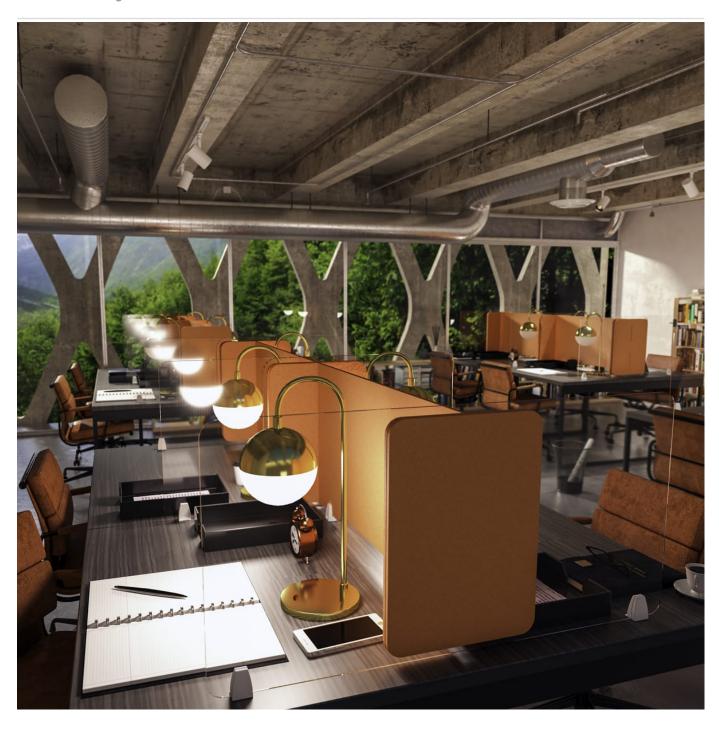



EUCALYPTUS - TIMBER PET



IRONBARK - TIMBER PET




MERBAU - TIMBER PET



SPOTTED GUM -TIMBER PET

**Screens** » Benching Screens

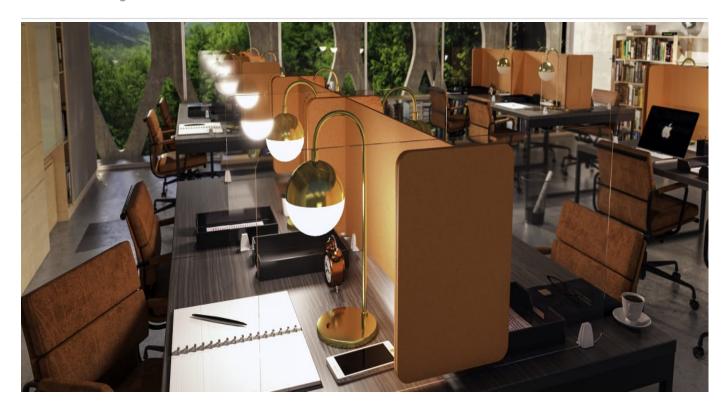

Unna Benching Screen's range of designs, widths and finishes is ideal for converting existing tables and benches into private workspaces.

Description	The modern design, optional acrylic panel and integrated cord management create a clean, uncluttered workspace that remove distractions. The 24" high screen is available in 54", 110" and 165" widths, so it works with a variety of tabletops and aesthetics.  func., Unna Benching Screens are easily cleaned with bleach and water.
Made In	USA
Dimensions	<ul> <li>55"(1397mm) w x 24" (610mm) h x 48" (1207mm) d</li> <li>110" (2794mm) w x 24" (610mm) h x 48" (1207mm) d</li> <li>165" (4191mm) w x 24" (610mm) h x 48" (1207mm) d</li> </ul>
Powder Coat	White ONLY



PET Colours	<ul> <li>24 Colors – Bark, Brick, Cadet, Chambray, Cobalt, Ecru, Fossil, Frost, Grass, Greige, Ivory, Linen, Malachite, Mandarin, Midnight, Ochre, Olive, Pebble, Pewter, Sky, Slate, Smoke, Sunshine, Tar.</li> <li>4 Timber Prints – Eucalyptus, Iron bark, Merbau, Spotted Gum.</li> </ul>
Acrylic	• Clear
	• Frost
Composition	Density 0.5 lb/ft² 2.4 kg /m²
Material	60% post-consumer recycled PET bottles.
	35% pre-consumer recycled content from PET chips
	• 5% bio-based Polylactic Acid (PLA)
Fire Rating	ASTM-E84 – Class A classification AS ISO 9705 – 2003 – Group 1 classification EN-13501 – B-s2-d0 classification
Warranty	5-year warranty.
Lead Time	4 weeks
Assembly & Delivery	Flat pack delivery, minimal assembly required.
	See installation instructions for detail.
How to Specify	• Select 1 x PET Color
	White Powder Coat ONLY
	Select Acrylic Panel - Clear or Frosted



Care Instructions	Dab func. with a damp clean cloth and mild solution of liquid detergent and warm water. Repeat using only clean water, then pat dry with a lint free cloth.
	For difficult stains, use a solution of household bleach (10% bleach / 90% water).
	To remove the bleach, repeat using a clean, water dampened cloth, then pat dry.
	Always test in an inconspicuous area first and if you don't see the expected results, contact us.
Additional Comments	To see how vivid the colors truly are, it's easy to request a sample through the "Request information" button on this page, or you can ask for one from your local sales guru.
Inclusions	Desk Shell Clamp brackets, PET/Acrylic panels

