
Walls » Mobile Walls



Collection: Cooee






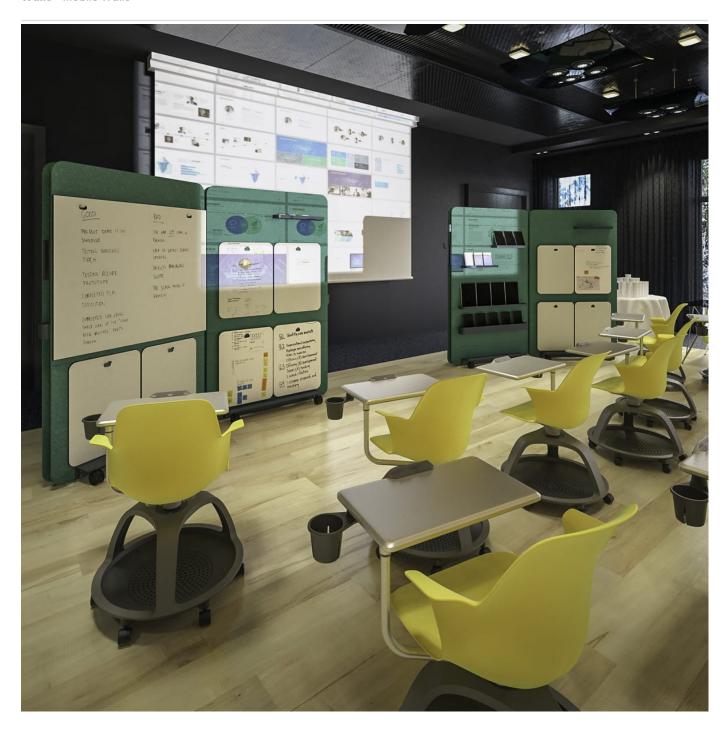





Walls » Mobile Walls

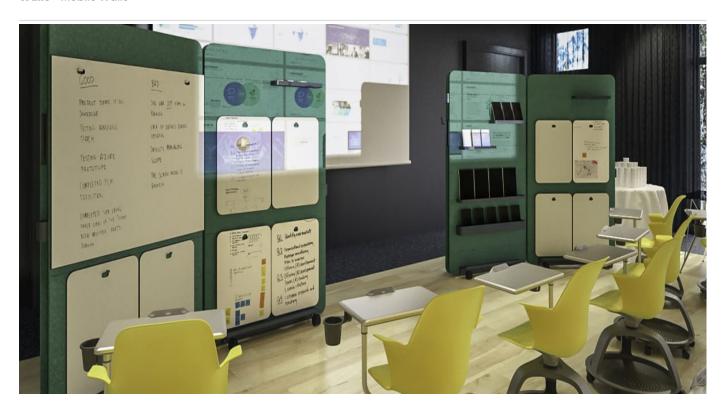

Cooee Collaboration Wall stop fighting for real estate on one Big Whiteboard, perfect when everyone wants to explain themselves. 4 Small Whiteboards.

Absorbs Noise	Easy Install	• Easy Clean
ADSOLDS HOISE	- Lusy ilistuii	- Lusy Cleuit

Bleach Cleanable
 Acoustic

Description

Why stop at one whiteboard when you could have four, on each side.

The Cooee Collaboration Wall has four erasable and magnetic Small Whiteboards, four Hooks, plus a Short Tray to hold markers. The whiteboards are perfect when everyone wants to explain themselves. It saves having to fight for real estate on one Big Whiteboard.

The lightweight internal frame is complemented by a steel base and lockable casters, so that its strong, stable, and maneuverable. Superior noise reduction is achieved with the combination of sustainable, sound absorbing PET and a noise blocking membrane.

It is the mobile wall your team will ask for.

func., Cooee Walls are easily cleaned with bleach and water

Made In USA



Dimensions 47.5" (1207mm) w x 78.5" (1894mm) h x 15" (380mm) d Powder Coat Anodized Silver, Bengal White, Denim, Fern, Gunmetal, LT Grey, Marigold, Matte Black, Spice, Tango, Teal, Terracotta. PET Colours 24 Colors – Bark, Brick, Cadet, Chambray, Cobalt, Ecru, Fossil, Frost, Grass, Greige, Ivory, Linen, Malachite, Mandarin, Midnight, Ochre, Olive, Pebble, Pewter, Sky, Slate, Smoke, Sunshine, Tar. 4 Timber Prints – Eucalyptus, Iron bark, Merbau, Spotted Gum. Composition Density 0.5 lb/ft² 2.4 kg /m² Material • 60% post-consumer recycled PET bottles. • 35% pre-consumer recycled content from PET chips • 5% bio-based Polylactic Acid (PLA) • Accessories: Steel + PET insert/liner with powder coat finish Fire Rating ASTM-EB4 – Class A classification AS ISO 9705 – 2003 – Group 1 classification EN-13501 – B-s2-do classification Warranty 5-year warranty. Lead Time 6-8 weeks Assembly & Delivery Flat pack delivery, minimal assembly required. See installation instructions for detail. How to Specify • Select 1 x PET Color • Select 1 x Powder Coat Finish • Refer Product Specification Guide			
Matte Black, Spice, Tango, Teal, Terracotta. 24 Colors – Bark, Brick, Cadet, Chambray, Cobalt, Ecru, Fossil, Frost, Grass, Greige, Ivory, Linen, Malachite, Mandarin, Midnight, Ochre, Olive, Pebble, Pewter, Sky, Slate, Smoke, Sunshine, Tar. 4 Timber Prints – Eucalyptus, Iron bark, Merbau, Spotted Gum. Composition Density 0.5 Ib/ft² 2.4 kg /m² Material • 60% post-consumer recycled PET bottles. • 35% pre-consumer recycled content from PET chips • 5% bio-based Polylactic Acid (PLA) • Accessories: Steel + PET insert/liner with powder coat finish Fire Rating ASTM-E84 – Class A classification AS ISO 9705 – 2003 – Group 1 classification EN-13501 – B-s2-d0 classification Warranty 5-year warranty. Lead Time 6-8 weeks Assembly & Delivery Flat pack delivery, minimal assembly required. See installation instructions for detail. How to Specify • Select 1 x PET Color • Select 1 x Powder Coat Finish	Dimensions	47.5" (1207mm) w x 78.5" (1994mm) h x 15" (380mm) d	
Greige, Ivory, Linen, Malachite, Mandarin, Midnight, Ochre, Olive, Pebble, Pewter, Sky, Slate, Smoke, Sunshine, Tar. 4 Timber Prints – Eucalyptus, Iron bark, Merbau, Spotted Gum. Composition Density 0.5 lb/ft² 2.4 kg /m² Material 60% post-consumer recycled PET bottles. 35% pre-consumer recycled content from PET chips 5% bio-based Polylactic Acid (PLA) Accessories: Steel + PET insert/liner with powder coat finish Fire Rating ASTM-E84 – Class A classification AS ISO 9705 – 2003 – Group 1 classification EN-13501 – B-s2-d0 classification Warranty 5-year warranty. Lead Time 6-8 weeks Assembly & Delivery Flat pack delivery, minimal assembly required. See installation instructions for detail. How to Specify Select 1 x PET Color Select 1 x Powder Coat Finish	Powder Coat	, ,	
Material • 60% post-consumer recycled PET bottles. • 35% pre-consumer recycled content from PET chips • 5% bio-based Polylactic Acid (PLA) • Accessories: Steel + PET insert/liner with powder coat finish Fire Rating ASTM-E84 - Class A classification AS ISO 9705 - 2003 - Group 1 classification EN-13501 - B-s2-d0 classification EN-13501 - B-s2-d0 classification Warranty 5-year warranty. Lead Time 6-8 weeks Assembly & Delivery Flat pack delivery, minimal assembly required. See installation instructions for detail. How to Specify • Select 1 x PET Color • Select 1 x Powder Coat Finish	PET Colours	Greige, Ivory, Linen, Malachite, Mandarin, Midnight, Ochre, Olive, Pebble, Pewter, Sky, Slate, Smoke, Sunshine, Tar.	
* 35% pre-consumer recycled content from PET chips * 5% bio-based Polylactic Acid (PLA) * Accessories: Steel + PET insert/liner with powder coat finish Fire Rating ASTM-E84 - Class A classification AS ISO 9705 - 2003 - Group 1 classification EN-13501 - B-s2-d0 classification Warranty 5-year warranty. Lead Time 6-8 weeks Assembly & Delivery Flat pack delivery, minimal assembly required. See installation instructions for detail. How to Specify * Select 1 x PET Color * Select 1 x Powder Coat Finish	Composition	Density 0.5 lb/ft² 2.4 kg /m²	
AS ISO 9705 – 2003 – Group 1 classification EN-13501 – B-s2-d0 classification Warranty 5-year warranty. Lead Time 6-8 weeks Assembly & Delivery Flat pack delivery, minimal assembly required. See installation instructions for detail. How to Specify • Select 1 x PET Color • Select 1 x Powder Coat Finish	Material	 35% pre-consumer recycled content from PET chips 5% bio-based Polylactic Acid (PLA) 	
Lead Time 6-8 weeks Assembly & Delivery Flat pack delivery, minimal assembly required. See installation instructions for detail. How to Specify • Select 1 x PET Color • Select 1 x Powder Coat Finish	Fire Rating	AS ISO 9705 – 2003 – Group 1 classification	
Assembly & Delivery Flat pack delivery, minimal assembly required. See installation instructions for detail. How to Specify • Select 1 x PET Color • Select 1 x Powder Coat Finish	Warranty	5-year warranty.	
See installation instructions for detail. How to Specify • Select 1 x PET Color • Select 1 x Powder Coat Finish	Lead Time	6-8 weeks	
Select 1 x Powder Coat Finish	Assembly & Delivery		
	How to Specify	Select 1 x Powder Coat Finish	



Care Instructions	Remove spills immediately using a clean damp cloth or soap and water. Polyester carpet and fabric cleaners can be used - always test an inconspicuous area first. A stain-repellent coating is available for additional protection. To disinfect, bleach can be used in accordance with CDC cleaning and disinfection instructions. (Solution ratio is 5 tablespoons of bleach to 1 Gallon (3.7 ltr) of water or 4 teaspoons of bleach per quart (0.95 ltr) of water. Spray apply the solution as a mist and wipe-off surface moisture.	
Additional Comments	To see how vivid the colors truly are, it's easy to request a sample through the "Request information" button on this page, or you can ask for one from your local sales guru	
Inclusions	Mobile wall with 2 cups, 8 hooks, 8 small whiteboards	

