Screens » Floor Screens




Collections: Yakka

Applications: Screens & Partitions



Screens » Floor Screens



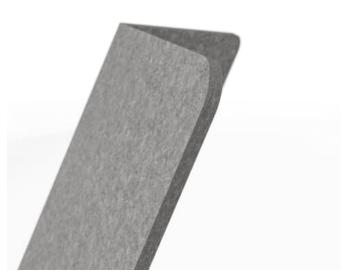





Screens » Floor Screens







Screens » Floor Screens

Yakka Floor Screen is one of a kind - a super light, noise absorbing, freestanding feature, that adds personality and privacy to open spaces.

✓ Absorbs Noise ✓ Easy Install ✓ Easy Clean

✓ Acoustic ✓ Bleach Cleanable

Description

The Yakka Floor Screen is a one of a kind, a free-standing room feature, that adds personality and reduces noise.

The unique cantilevered design creates a distinctive feature in almost any room. The 42" x 72" progressive aesthetics are complemented by the choice of 24 PET colors, 4 wood prints and a Blonde, Dark, White or Black wooden base.

Manufactured in the USA, the Yakka Floor Screen ships quickly, comes flat packed and is super simple to assemble.

func., Yakka Floor Screens are easily cleaned with bleach and water.

Composition

Density 0.5 lb/ft² 2.4 kg/m²

PET Colours

Standard Finishes:

30 Solid Colors: Bark, Brick, Cadet, Chambray, Cobalt, Ecru, Elderberry, Fossil, Frost, Grass, Greige, Ivory, Linen, Malachite, Mandarin, Meadow, Midnight, Ochre, Olive, Parchment, Pebble, Pewter, Saffron, Sky, Slate, Smoke, Storm, Sunshine, Tar, Twilight.

4 Timber Prints: Eucalyptus, Iron bark, Merbau, Spotted Gum.

Premium Finishes:

12 Premium Wood Prints: Australian Walnut, Cherry, Claro Walnut, Euro Beech, Knotty Pine, Lace Wood, Maple, Palm Wood, Poplar, Redwood, Rustic Walnut, White Oak.

18 Premium Material Prints: Concrete Cast, Concrete Polished, Concrete Dark Tint, Raku Bone, Raku Luster, Raku Jade, Shale Light, Shale Medium, Shale Dark, Terracotta Sun Bleached, Terracotta Mission, Terracotta Antique, Terrazzo Light, Terrazzo Medium, Terrazzo Dark, Travertine Light, Travertine Medium, Travertine Dark.



Screens » Floor Screens

Material	 60% post-consumer recycled PET bottles. 35% pre-consumer recycled content from PET chips 5% bio-based Polylactic Acid (PLA)
Wood	BlondeDarkWhiteBlack
Dimensions	42" (1067mm) w x 72" (1829mm) h x 21" (533mm) d
Fire Rating	Tested in accordance with AS ISO 9705 2003 for the purpose of determining the Group Number classification required by the Building Code of Australia for the control of fire spread on interior wall and ceiling linings. Classification - Group 1 Specific Extinction - Less than 250m²/kg
Made In	USA
Lead Time	4 weeks
Inclusions	Wood base, PET panel
Assembly & Delivery	Flat pack delivery, minimal assembly required. See installation instructions for detail.



Screens » Floor Screens

Care Instructions

Dab func. with a damp clean cloth and mild solution of liquid detergent and warm water. Repeat using only clean water, then pat dry with a lint free cloth.

For difficult stains, use a solution of household bleach (10% bleach / 90% water).

To remove the bleach, repeat using a clean, water dampened cloth, then pat dry.

Always test in an inconspicuous area first and if you don't see the expected results, contact us.

Warranty

5-year warranty. Visit <u>baresque.com.au/warranty</u> for complete details.

Additional Comments

To see how vivid the colors truly are, it's easy to request a sample through the "Request information" button on this page, or you can ask for one from your local sales guru.

How to Specify

- Select 1 x PET Color
- Select 1 x Wood Finish
- Refer Product Specification Guide



Screens » Floor Screens

Colour & Finish Options

func solid colors






Screens » Floor Screens



func timber print

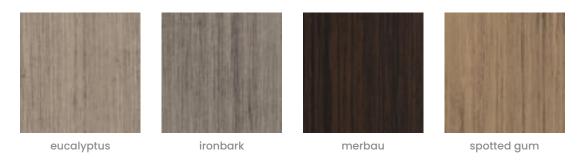

func premium material



Screens » Floor Screens




func premium wood



Screens » Floor Screens

func wood









Dark

Black