
Screens » Floor Screens



Collection: Yakka





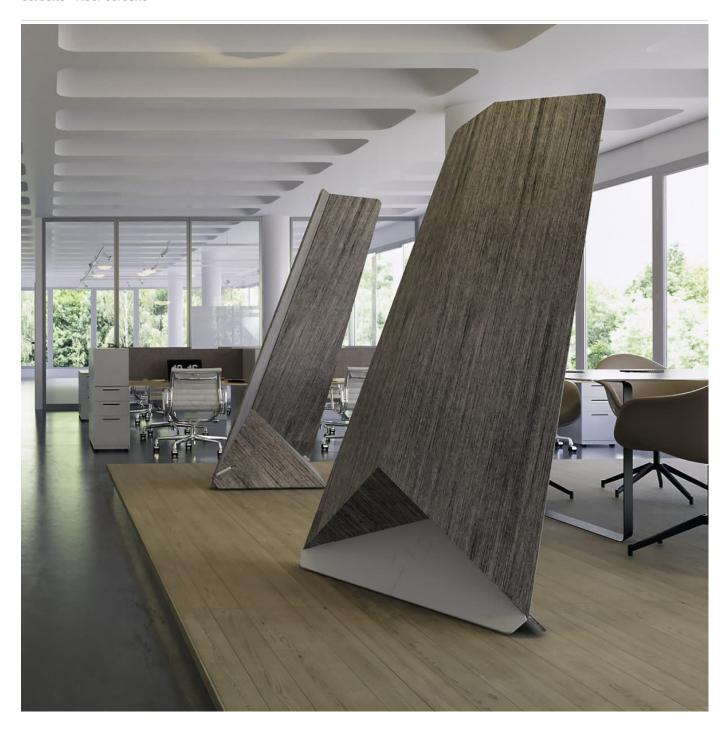




IRONBARK - TIMBER
PET



MERBAU - TIMBER PET



SPOTTED GUM -TIMBER PET















Screens » Floor Screens

Yakka Floor Screen is one of a kind - a super light, noise absorbing, freestanding feature, that adds personality and privacy to open spaces.

Absorbs Noise	Easy Install	Easy Clean	
• Acoustic	Bleach Cleanable		
Description	The Yakka Floor Screen is a one of a kind, a free-standing room feature, that adds personality and reduces noise.		
	The unique cantilevered design creates a distinctive feature in almost any room. The 42" x 72" progressive aesthetics are complemented by the choice of 24 PET colors, 4 wood prints and a Blonde, Dark, White or Black wooden base.		
	Manufactured in the USA, the Y packed and is super simple to	akka Floor Screen ships quickly, comes flat assemble.	
	func., Yakka Floor Screens are	easily cleaned with bleach and water.	
Made In	USA		
Dimensions	42" (1067mm) w x 72" (1829mm) h x 21" (533mm) d		
PET Colours	Standard Finishes:		
	30 Solid Colors: Bark, Brick, Cadet, Chambray, Cobalt, Ecru, Elderberry, Fossil, Frost, Grass, Greige, Ivory, Linen, Malachite, Mandarin, Meadow, Midnight, Ochre, Olive, Parchment, Pebble, Pewter, Saffron, Sky, Slate, Smoke, Storm, Sunshine, Tar, Twilight.		
	4 Timber Prints: Eucalyptus, Iro	on bark, Merbau, Spotted Gum.	
	Premium Finishes:		
		ralian Walnut, Cherry, Claro Walnut, Euro , Maple, Palm Wood, Poplar, Redwood, Rustic	
	18 Premium Material Prints: Concrete Cast, Concrete Polished, Concrete Dark Tint, Raku Bone, Raku Luster, Raku Jade, Shale Light, Shale Medium, Shale Dark, Terracotta Sun Bleached, Terracotta Mission, Terracotta Antique, Terrazzo Light, Terrazzo Medium, Terrazzo Dark, Travertine Light, Travertine Medium, Travertine Dark.		



Wood	• Blonde
	• Dark
	• White
	• Black
Composition	Density 0.5 lb/ft² 2.4 kg /m²
Material	60% post-consumer recycled PET bottles.
	• 35% pre-consumer recycled content from PET chips
	• 5% bio-based Polylactic Acid (PLA)
Fire Rating	Tested in accordance with AS ISO 9705 2003 for the purpose of determining the Group Number classification required by the Building Code of Australia for the control of fire spread on interior wall and ceiling linings.
	Classification - Group 1 Specific Extinction - Less than 250m²/kg
Warranty	5-year warranty. Visit <u>baresque.com.au/warranty</u> for complete details.
Lead Time	4 weeks
Assembly & Delivery	Flat pack delivery, minimal assembly required.
	See installation instructions for detail.
How to Specify	Select 1 x PET Color
	Select 1 x Wood Finish
	Refer Product Specification Guide



Care Instructions	Dab func. with a damp clean cloth and mild solution of liquid detergent and warm water. Repeat using only clean water, then pat dry with a lint free cloth.
	For difficult stains, use a solution of household bleach (10% bleach / 90% water).
	To remove the bleach, repeat using a clean, water dampened cloth, then pat dry.
	Always test in an inconspicuous area first and if you don't see the expected results, contact us.
Additional Comments	To see how vivid the colors truly are, it's easy to request a sample through the "Request information" button on this page, or you can ask for one from your local sales guru.
Inclusions	Wood base, PET panel

