Screens » Suspended Screens



Collection: Kaya



Screens » Suspended Screens





Screens » Suspended Screens



IRONBARK - TIMBER PET




MERBAU - TIMBER PET



SPOTTED GUM -TIMBER PET

Screens » Suspended Screens

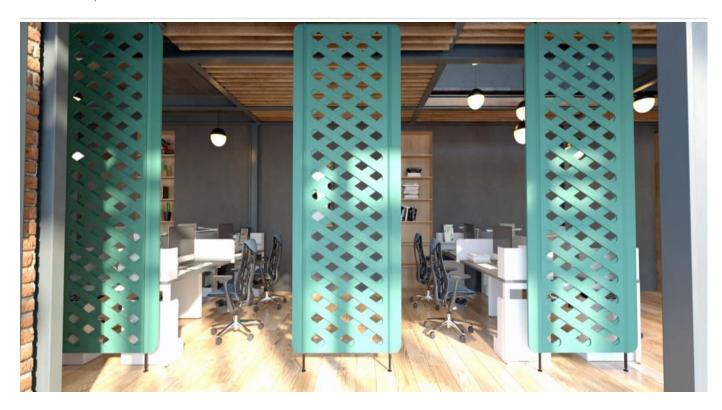

Kaya Fixed Screen's uses simple, adjustable top and bottom mounts to fix it to perfectly flat or uneven floors and ceilings.

Absorbs Noise Bleach Cleanable	• Easy Install • Acoustic	• Easy Clean
- Bledcii Clediidble	Acoustic	
Description	The Kaya Fixed Screen's lightweight construction uses simple top and bottom mounts to create a sturdy partition.	
		gns come with the option of acrylic for ole surface to foster those creative moments.
	func., Kaya Fixed Screens are e	easily cleaned with bleach and water.
Made In	USA	
Dimensions	45.8" (1163mm) w x 108" (2744mm) h x 2" (48mm) d	
Powder Coat	White ONLY	



Screens » Suspended Screens

PET Colours	 24 Colors – Bark, Brick, Cadet, Chambray, Cobalt, Ecru, Fossil, Frost, Grass, Greige, Ivory, Linen, Malachite, Mandarin, Midnight, Ochre, Olive, Pebble, Pewter, Sky, Slate, Smoke, Sunshine, Tar. 4 Timber Prints – Eucalyptus, Iron bark, Merbau, Spotted Gum. 	
Composition	Density 0.5 lb/ft² 2.4 kg /m²	
Material	 60% post-consumer recycled PET bottles. 35% pre-consumer recycled content from PET chips 5% bio-based Polylactic Acid (PLA) 	
Fire Rating	ASTM-E84 – Class A classification AS ISO 9705 – 2003 – Group 1 classification EN-13501 – B-s2-d0 classification	
Warranty	5-year warranty.	
Lead Time	4 weeks	
Assembly & Delivery	Flat pack delivery, minimal assembly required. See installation instructions for detail.	



Screens » Suspended Screens

How to Specify

- Select 1 x PET Color
- Powder Coat Finish WHITE ONLY
- 1. Select Design
- Grille
- Lattice
- Plain Design
- 2. Select Acrylic if Option selected
- Clear
- Frosted
- 3. Select Writeable Surface if option selected
- Refer to Product Specification Guide

Care Instructions

Dab func. with a damp clean cloth and mild solution of liquid detergent and warm water. Repeat using only clean water, then pat dry with a lint free cloth.

For difficult stains, use a solution of household bleach (10% bleach / 90% water).

To remove the bleach, repeat using a clean, water dampened cloth, then pat dry.

Always test in an inconspicuous area first and if you don't see the expected results, contact us.

Additional Comments

To see how vivid the colors truly are, it's easy to request a sample through the "Request information" button on this page, or you can ask for one from your local sales guru.

Inclusions

PET panel, Metal frame, Hardware

