Screens » Suspended Screens




Collection: Kaya







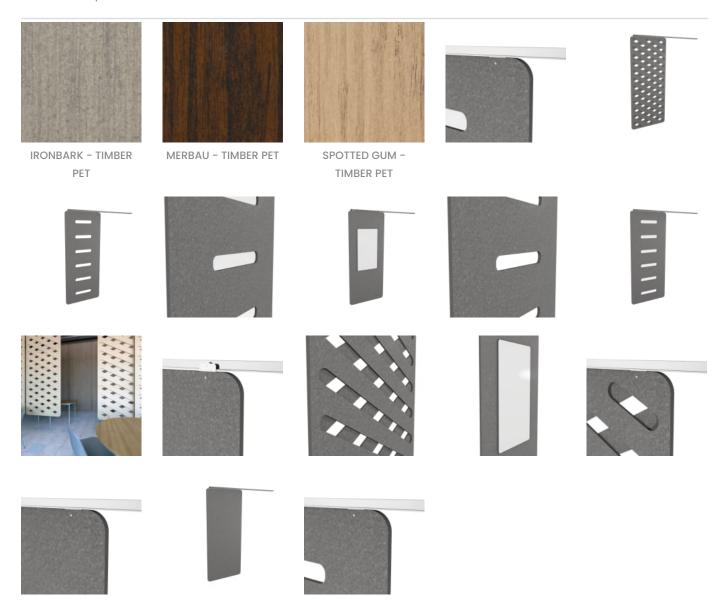

Screens » Suspended Screens

Kaya Sliding Screen hangs on horizontal mounting tracks attached to the ceiling. It means smooth, easy movement and excellent space creation.

	ADSOLDS NOISC	Lusy motum	Lusy Olculi
•	Bleach Cleanable	• Acoustic	

Facy install

Description

Absorbs Noise

The Kaya Sliding Screen hangs on horizontal mounting tracks for smooth, easy movement.

Fasy Clean

The Grille, Lattice or Plain designs are complemented with optional acrylic for privacy or a writeable surface for those creative moments. Available in 24 PET colors or 4 wood prints, the option of adding multiple screens makes it's ideal for expandable acoustic management in small or large spaces.

func., Kaya Sliding Screens are easily cleaned with bleach and water.

Made In	USA
Dimensions	47.5" (1207mm) w x 108" (2744mm) h x 3" (55mm) d

PET Colours

Standard Finishes:

30 Solid Colors: Bark, Brick, Cadet, Chambray, Cobalt, Ecru, Elderberry, Fossil, Frost, Grass, Greige, Ivory, Linen, Malachite, Mandarin, Meadow, Midnight, Ochre, Olive, Parchment, Pebble, Pewter, Saffron, Sky, Slate, Smoke, Storm, Sunshine, Tar, Twilight.

4 Timber Prints: Eucalyptus, Iron bark, Merbau, Spotted Gum.

Premium Finishes:

12 Premium Wood Prints: Australian Walnut, Cherry, Claro Walnut, Euro Beech, Knotty Pine, Lace Wood, Maple, Palm Wood, Poplar, Redwood, Rustic Walnut, White Oak.

18 Premium Material Prints: Concrete Cast, Concrete Polished, Concrete Dark Tint, Raku Bone, Raku Luster, Raku Jade, Shale Light, Shale Medium, Shale Dark, Terracotta Sun Bleached, Terracotta Mission, Terracotta Antique, Terrazzo Light, Terrazzo Medium, Terrazzo Dark, Travertine Light, Travertine Medium, Travertine Dark.

Composition Density 0.5 lb/ft² 2.4 kg /m²



Material	 60% post-consumer recycled PET bottles. 35% pre-consumer recycled content from PET chips 5% bio-based Polylactic Acid (PLA) 	
Fire Rating	ASTM-E84 – Class A classification AS ISO 9705 – 2003 – Group 1 classification EN-13501 – B-s2-d0 classification	
Warranty	5-year warranty.	
Lead Time	4 weeks	
Assembly & Delivery	Flat pack delivery, minimal assembly required. See installation instructions for detail.	
How to Specify	• Select 1 x PET Color	
	Powder Coat Finish WHITE ONLY	
	1. Select Design	
	• Grille	
	• Lattice	
	Plain Design	
	2. Select Acrylic - if Option selected	
	• Clear	
	• Frosted	
	3. Select Writeable Surface - if option selected	
	Refer to Product Specification Guide	



Care Instructions	Dab func. with a damp clean cloth and mild solution of liquid detergent and warm water. Repeat using only clean water, then pat dry with a lint free cloth.	
	For difficult stains, use a solution of household bleach (10% bleach / 90% water).	
	To remove the bleach, repeat using a clean, water dampened cloth, then pat dry.	
	Always test in an inconspicuous area first and if you don't see the expected results, contact us.	
Additional Comments	To see how vivid the colors truly are, it's easy to request a sample through the "Request information" button on this page, or you can ask for one from your local sales guru.	
Inclusions	PET panel with roller hardware fitted.	

